


DIN-RAIL VOEDING 240W 24V/10A

€ 119,00

Excl. BTW: € 98,35

Afbeeldingen

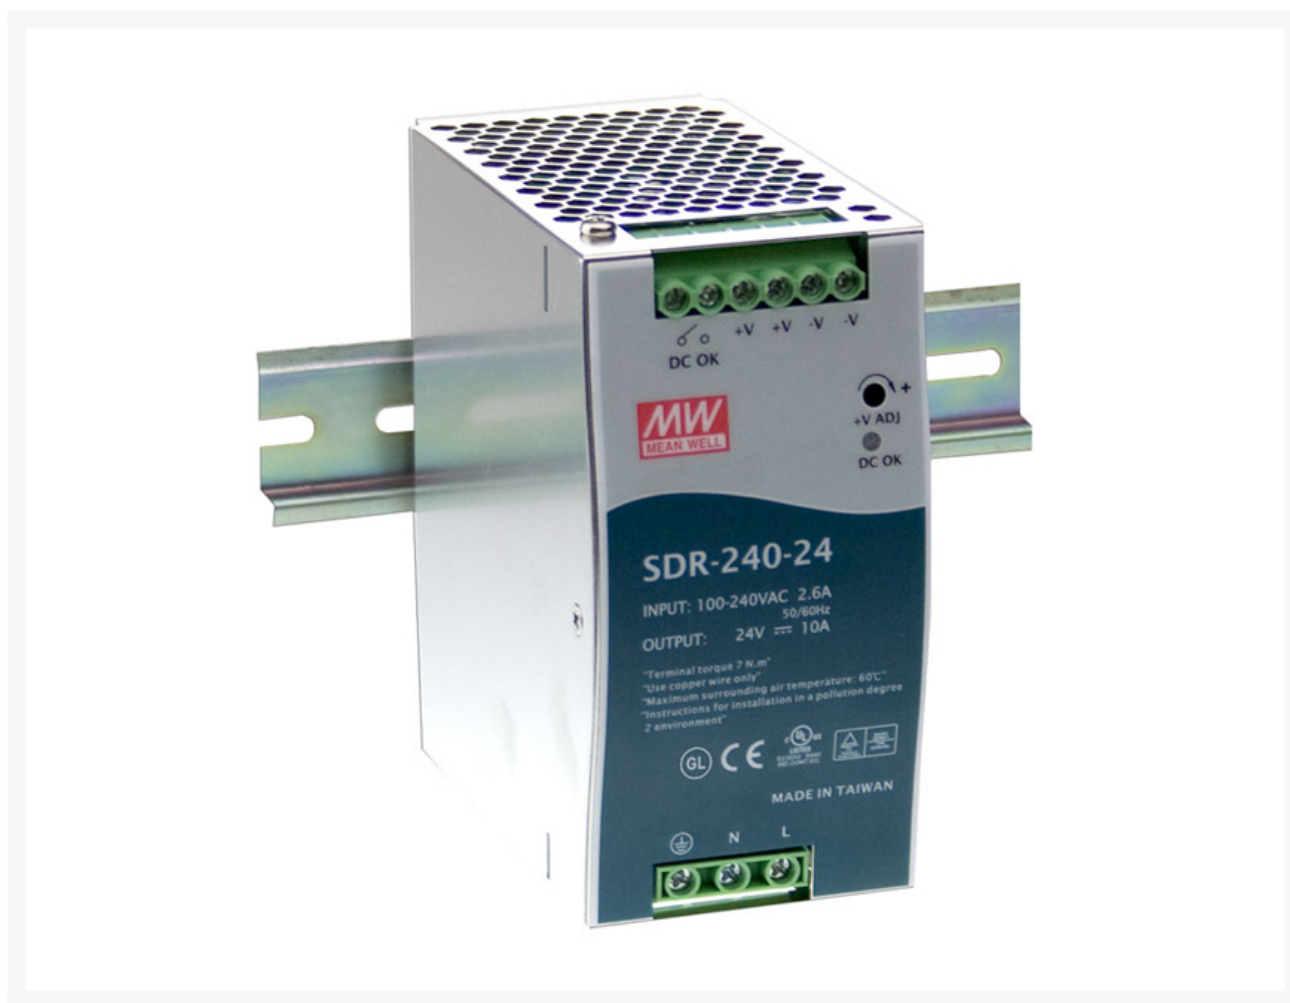

Beschrijving

High efficiency 94% and low power dissipation
150% peak load capability
Built-in active PFC function, PF>0.93
Protections: Short circuit / Overload / Over voltage / Over temperature
Cooling by free air convection
Can be installed on DIN rail TS-35/7.5 or 15
UL 508 (industrial control equipment) approved
EN61000-6-2(EN50082-2) industrial immunity level
Built-in DC OK relay contact
100% full load burn-in test

Technical Specifications

Input Voltage: 88 ~ 264VAC 124 ~ 370VDC

Input Inrush Current, Max.: 65A

uitgangsspanning: 24V +/-1.0%

uitgangsstroom: 10A

max. vermogen: 120W

afmetingen: 63 x 125,2 x 113,5mm

gewicht: 1,03kg

werktemperatuur: -25°C ~ 70°C

Productinformatie

Artikelnummer	SDR24024
Merk	MEANWELL
Is on Sale	Nee

