


COAX ZWART 50 OHM 3.6DB BIJ 100MHZ 10.3MM

€ 3,75

Excl. BTW: € 3,10

Afbeeldingen

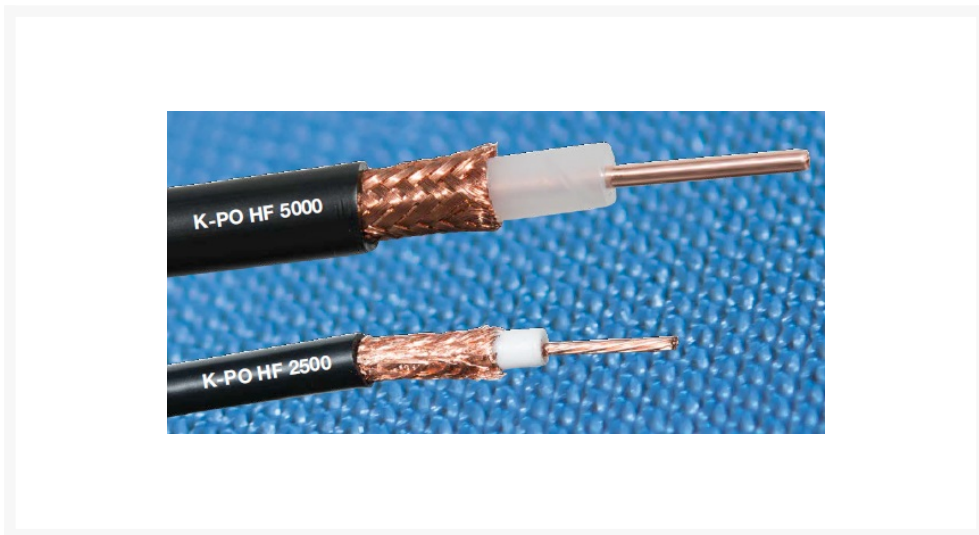

	K-PO HF 5000	K-PO HF 2500
Impedance	50 ± 3 Ohm	50 ± 3 Ohm
Capacitance	80 pF/m	80 pF/m
Selectivity Ratio	84 %	80 %
Resistance		
- Inner Conductor	3.7 Ohm	6.0 Ohm
- Shield	5.5 Ohm	11.0 Ohm
Tension		
- Sheath	9.5 kV	4.0 kV
- Outer Insulation		

Frequency (MHz)	Attenuation (dB/100m)	Attenuation (dB/10m)	Return Loss (dB)	Reflection Coefficient (dB)	SWR
10	1.2	0.12	20	19	1.05
100	3.6	0.36	18	17	1.06
500	9.0	0.90	16	15	1.07
1000	13.2	1.32	15	14	1.08
3000	21.10	2.11	14	13	1.09

Frequency (MHz)	Attenuation (dB/100m)	Attenuation (dB/10m)	Return Loss (dB)	Reflection Coefficient (dB)	SWR
10	1.2	0.12	20	19	1.05
100	3.6	0.36	18	17	1.06
500	9.0	0.90	16	15	1.07
1000	13.2	1.32	15	14	1.08
3000	21.10	2.11	14	13	1.09

Beschrijving

HF-5000

Impedance: 50 Ohm
Capacity pF/m: 80
Outer Diameter: 10,3 mm

Attenuation dB/100 m:

- 10 MHz 1.2
- 100 MHz 3.6
- 500 MHz 9.0
- 1000 MHz 13.20
- 3000 MHz 21.10

Productinformatie

Artikelnummer	HF5000
Merk	Brand

