


KONTAKTSTRIP 100P HAAKS VERTINT 10 STUKS RASTER 2.54MM

€ 54,99

Excl. BTW: € 45,45

Afbeeldingen

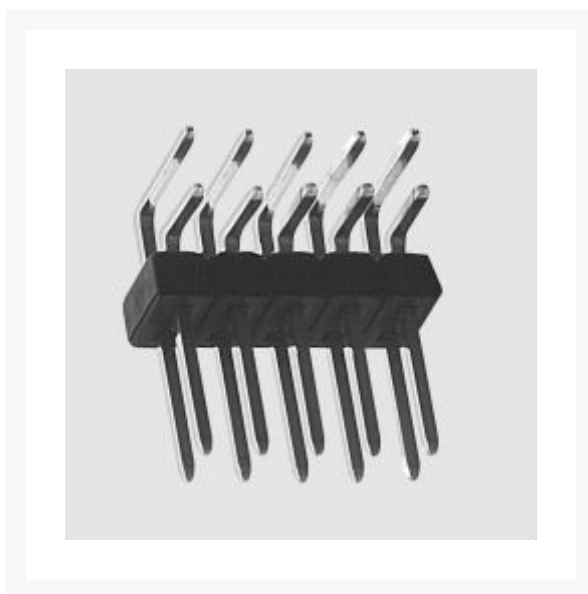

Beschrijving

Features

Tin-plated design

Arbitrary mounting

Technical Specifications

Insulating Shell: Thermoplastic, UL94V-0

Contact Material (DIN17660): Copper alloy

Contact Surface: Tin-plated

Insulation Resistance, Max.: 40mW

Rated Current: 3A

Rated Voltage: 250V AC

Insulation Resistance, Min.: 500MW

Temperature Range: -40...+105°C

Short Term (10s): +260°C

Solderability: IEC 68-2-20 Tb

Dimensions

Pin Length, Complete1): 14,7mm

Pin Length, Plug-in Area (B): 7,0mm

Pin Length, Soldered Area (C): 3,3mm

Pin Cross Section 0,635x0,635mm

Productinformatie

Artikelnummer	ASL100ZW
Merk	Brand
Is on Sale	Nee

