


RELAIS SOLID STATE 24-280VAC 40A INPUT 3-32VDC

€ 41,95

Excl. BTW: € 34,67

Afbeeldingen

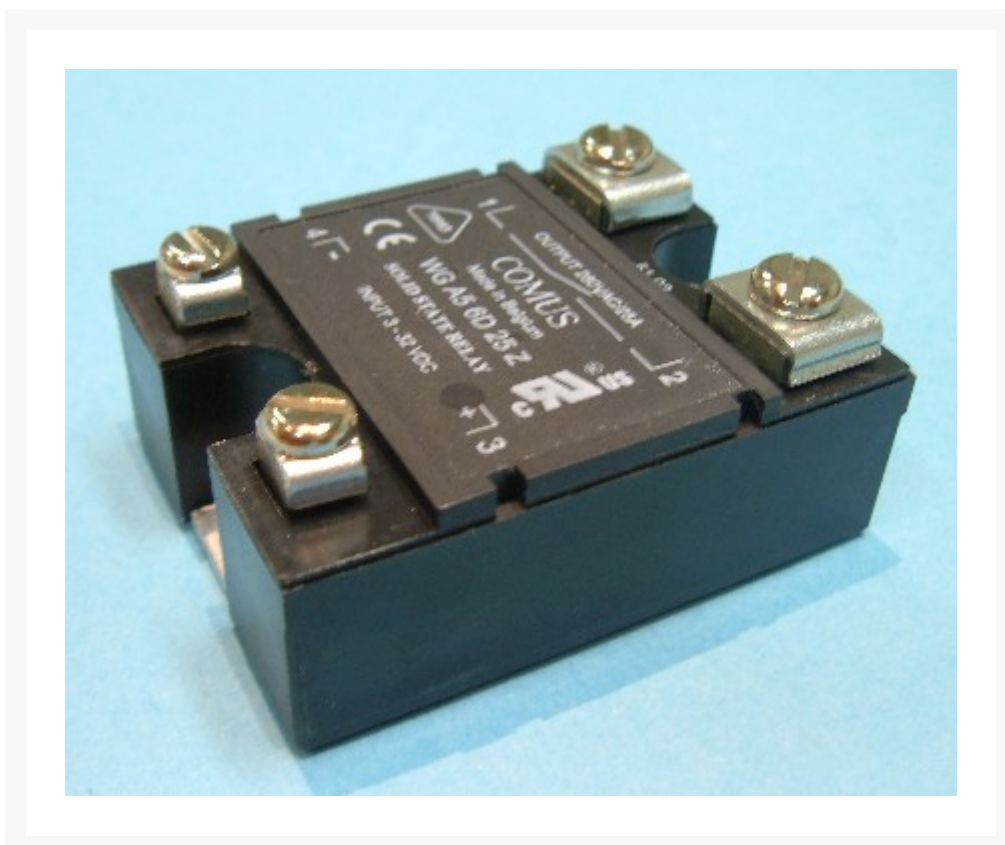

Beschrijving

Input circuit

Control voltage range 3...32 VDC

Control current max. 10 mA

Turn-off voltage min. 1 VDC

Input resistance Constant current

Output circuit

Load voltage range 24...280 VAC

Peak-off-state voltage 600 V_{drn}

Off-state leakage current 12 mA eff.

Load current range 0,2...40 A

Surge current 1 half wave 400 A peak

I²t for fusing 880 A²s

On-state voltage 1,85 V_{peak}

Off-state (static) dv/dt 500 V/s

Snubber 47 ohm / 100 nF

General data

Turn-on time max. 11 ms 0,1 ms

Turn-off time max. 11 ms

Line frequency range 47...63 Hz

Isolation volt. between input/output 4.000 V

Isolation volt. between input-output/base 2.500 V

Isolation resistance 50 MW

Operation temperature -20...+80 °C

Recommended varistor SIOV-S20 K230

Productinformatie

Artikelnummer	WGA56D40Z
Merk	COMUS
Is on Sale	Nee

