


RELAIS DIL REED 12VDC/500 OHM/24MA 1 X WISSEL 10W/0.5A

€ 9,95

Excl. BTW: € 8,22

Afbeeldingen

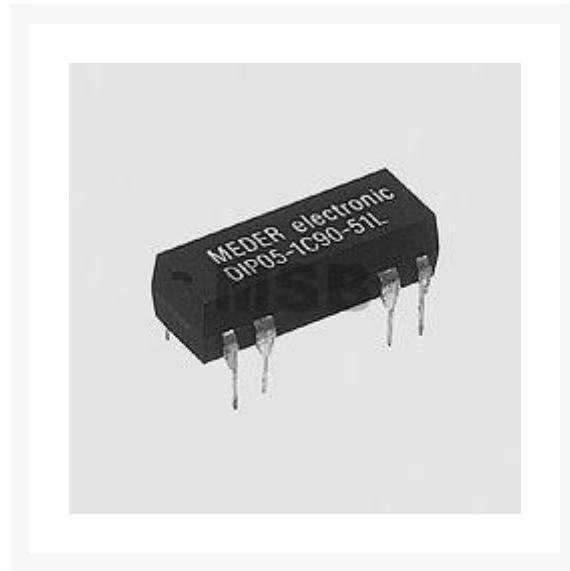

Beschrijving

Features

- Fully encapsulated
- Flux sealed construction
- Plug-in a 14-pole DIP/DIL-IC socket (see note)
- TTL control possible
- DIP\_51L: Low-profile

Technical Specifications

- Insulation Resistance (Coil/Contacts): 1012GW
- Insulation (Coil/Contacts): 1.500V DC
- Temperature Range: -20...+70°C
- Operate Time (incl. Bounce): 0,7ms
- Release Time: 1,0ms
- Vibration Resistance (10...2000Hz): 10G
- Soldering Temperature/Time: 260°C/5s

Contact Data

- Configuration: SPDT
- Contact Resistance: 150mW
- Switching Capacity, Max.: 10W

Switching Voltage, Max.: 175V DC  
Switching Current, Max.: 0,5A  
Current Measured After Closure, Max.: 1,0A  
Breakdown Voltage, Min.: 200V DC

Coil Data  
Coil Type: Non-Polarized, Monostable

## Productinformatie

---

Artikelnummer	R012D1WU
Merk	MEDER
Is on Sale	Nee

