


RELAIS SOLID STATE 24-280VAC 25A INPUT 3-32VDC

€ 29,50

Excl. BTW: € 24,38

Afbeeldingen

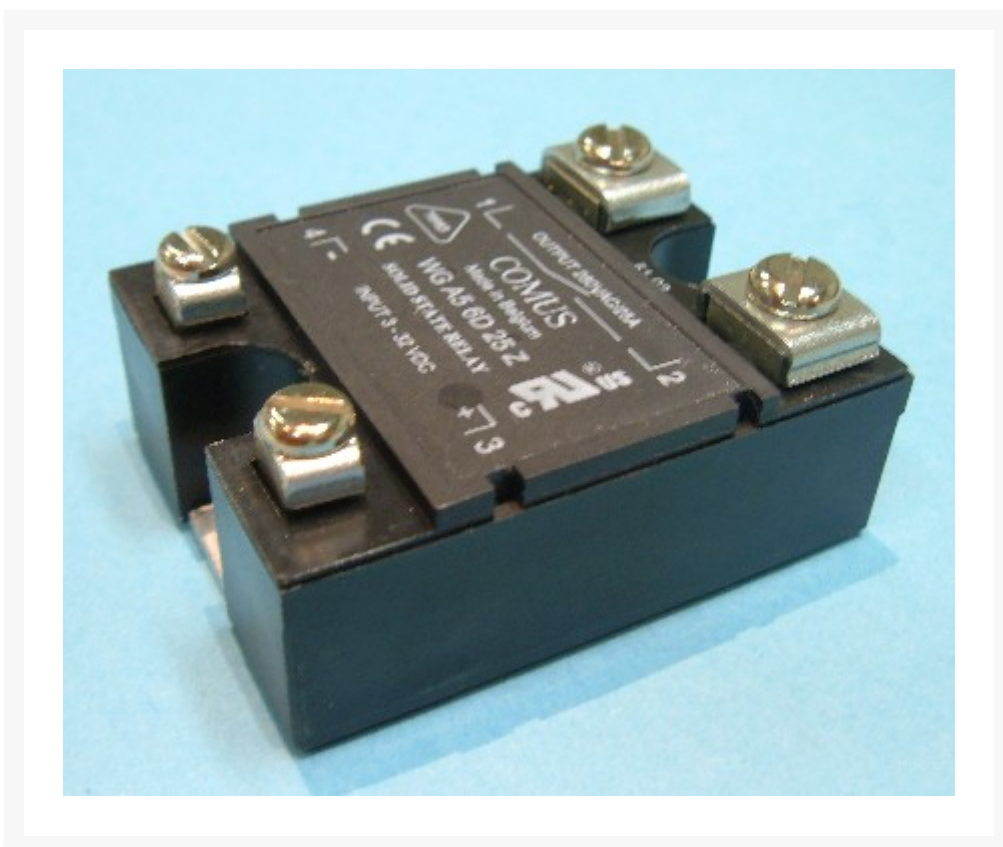

Beschrijving

Control voltage range 3...32 VDC  
Control current max. 10 mA  
Turn-off voltage min. 1 VDC  
Input resistance Constant current  
Output circuit  
Load voltage range 24...280 VAC  
Peak-off-state voltage 600 V<sub>drn</sub>  
Off-state leakage current 6 mA eff.  
Load current range 0,1...25 A  
Surge current 1 half wave 110 A peak  
 $I^2t$  for fusing 60 A<sup>2</sup>s  
On-state voltage 1,85 V<sub>peak</sub>  
Off-state (static) dv/dt 500 V/μs  
Snubber 47 ohm / 47 nF

#### General data

Turn-on time max. 11 ms 0,1 ms

Turn-off time max. 11 ms

Line frequency range 47...63 Hz

Isolation volt. between input/output 4.000 V

Isolation volt. between input-output/base 2.500 V

Isolation resistance 50 MW

Operation temperature -20...+80 °C

## Productinformatie

---

Artikelnummer	WGA56D25Z
Merk	COMUS
Is on Sale	Nee

