


## AFGESCHERMD 4X0.14MM2 ROND

€ 1,50

Excl. BTW: € 1,24

### Afbeeldingen

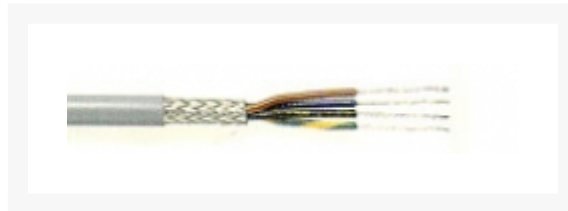

### Beschrijving

#### Features

Screening, Cu Plaited, Tinned: 85%  
Conductor Insulation: PVC YI 2  
Conductor Colours: DIN 47 100  
Conductor Composition: 18x0,10mm  
Outer Jacket: PVC YM 2  
Colour: Grey (RAL 7032)  
Flammability: Flame Resistant IEC332.1

#### Technical Specifications

Rated Voltage: 300V  
Test Voltage: >1,5kV  
Temperature Range Moving: -10...+70°C  
Temperature Range Stationary: -30...+80°C  
Insulation Resistance, Min.: 20MWxkm  
Conductor Resistance, Max.: 135W/km  
Cross-Section OuterØ [mm<sup>2</sup>]: 4x0,14  
OuterØ [mm]: 4,00 ±0,15

## Productinformatie

---

Artikelnummer	AKO4014
Merk	Brand
Is on Sale	Nee

