


**DIN-RAIL VOEDING 60W 13.8V/2,8A MET ACCULADER EN UPS FUNCTIE**

**€ 46,95**

Excl. BTW: € 38,80

**Afbeeldingen**

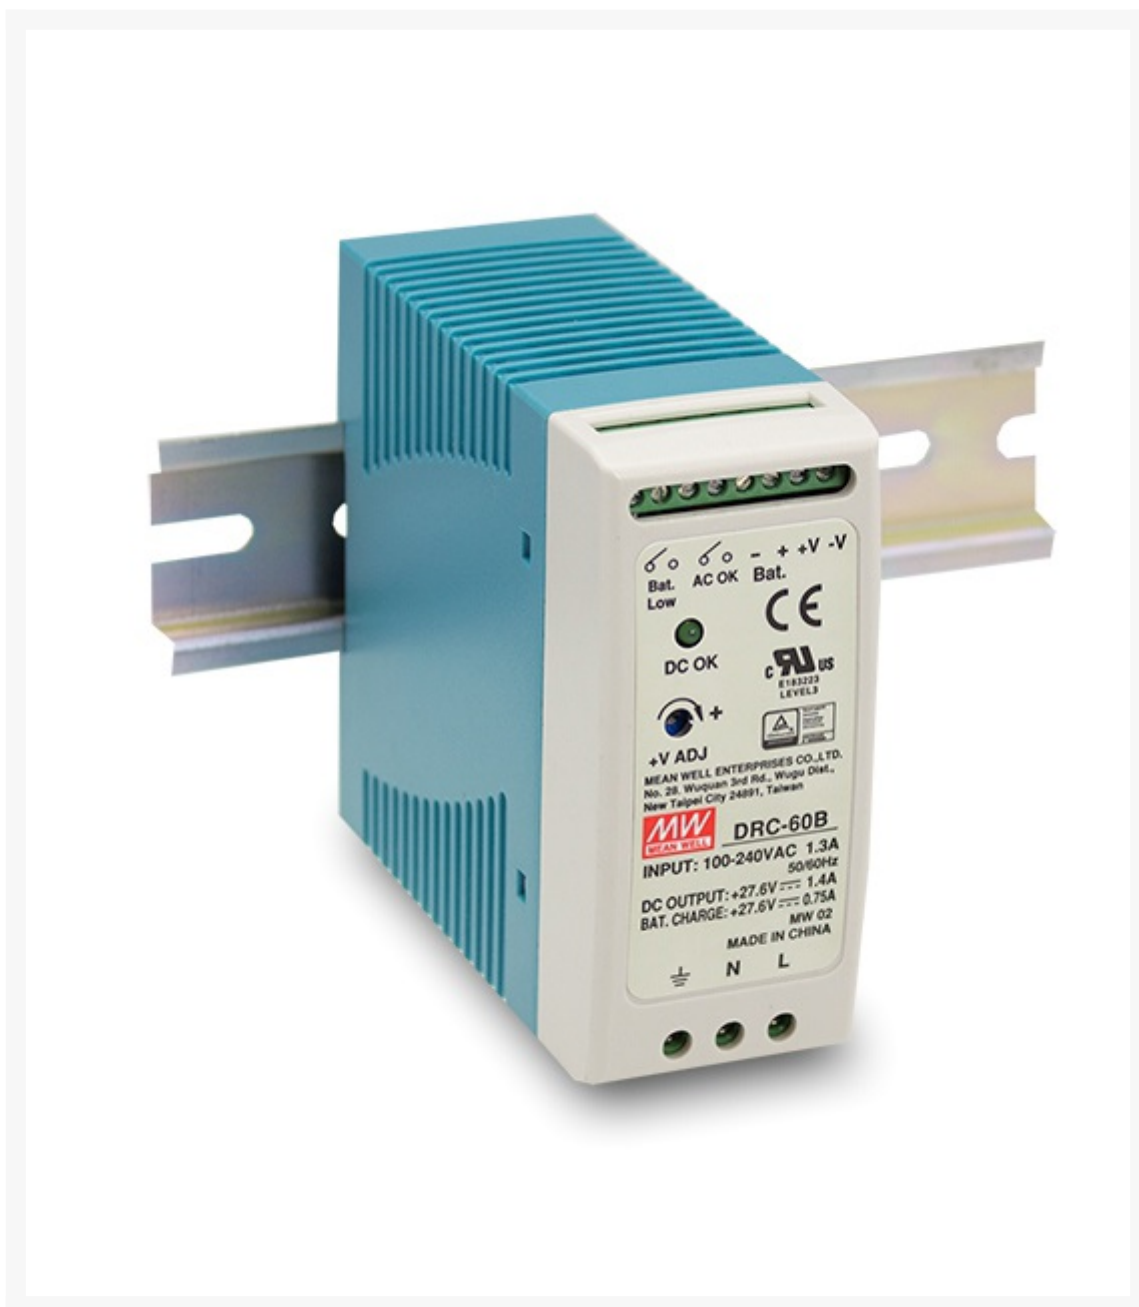

**Beschrijving**

Universal AC input / Full range

EProtections: Short circuit / Overload / Over voltage

- EBattery low protection / Battery reverse polarity protection by fuse
- ECan be installed on DIN rail TS-35/7.5 or 15
- EAlarm signal for AC OK and Battery low via TTL open collector, optional via relay)
- ECooling by free air convection
- EPass LPS
- ELED indicator for power on
- E100% full load burn-in test

DRC-60 is a 60W AC/DC DIN rail type security power supply series. In addition to the primary output, there is a charger output with a smaller rated current, enabling the backup power supply application the security access systems require. DRC-60 accepts the universal input between 90VAC and 264VAC, and supplies 13.8VDC and 27.6VDC at output, respectively. With the efficiency up to 88%, it can operate with air convection cooling under -30 through 70 . In addition to the key protection features ç] ç] such as overload protection, over voltage protection, battery low cut off, and battery reverse polarity protection (by fuse), the alarm signal for AC OK and battery low signaling is provided, via TTL open collector output for the standard model ( via relay contact output as the optional model), to facilitate the system design.

Vermogen : : 60W

Uitgang 1

- dc spanning : 13,8V
- Stroom (max.) : 2.8A
- Spanning instelbaar 12 ~ 15V
- Ripple & Noise (max.) : 120mVp-p

Uitgang 2

- dc spanning : 13,8V
- Stroom (max.) : 1.5A

- Ingang spanning : 90 ~ 264VAC 127 ~ 370VDC
- Frequentie : 47 ~ 63Hz

**Productinformatie**

Artikelnummer	DRC60A
Merk	MEANWELL
Is on Sale	Nee

