


**AANSLUITKLEM GRIJS 4.2MM VOOR 35MM DINRAIL MAX. 2.5MM²
KLEMAANSLUITING**

€ 1,25

Excl. BTW: € 1,03

Afbeeldingen

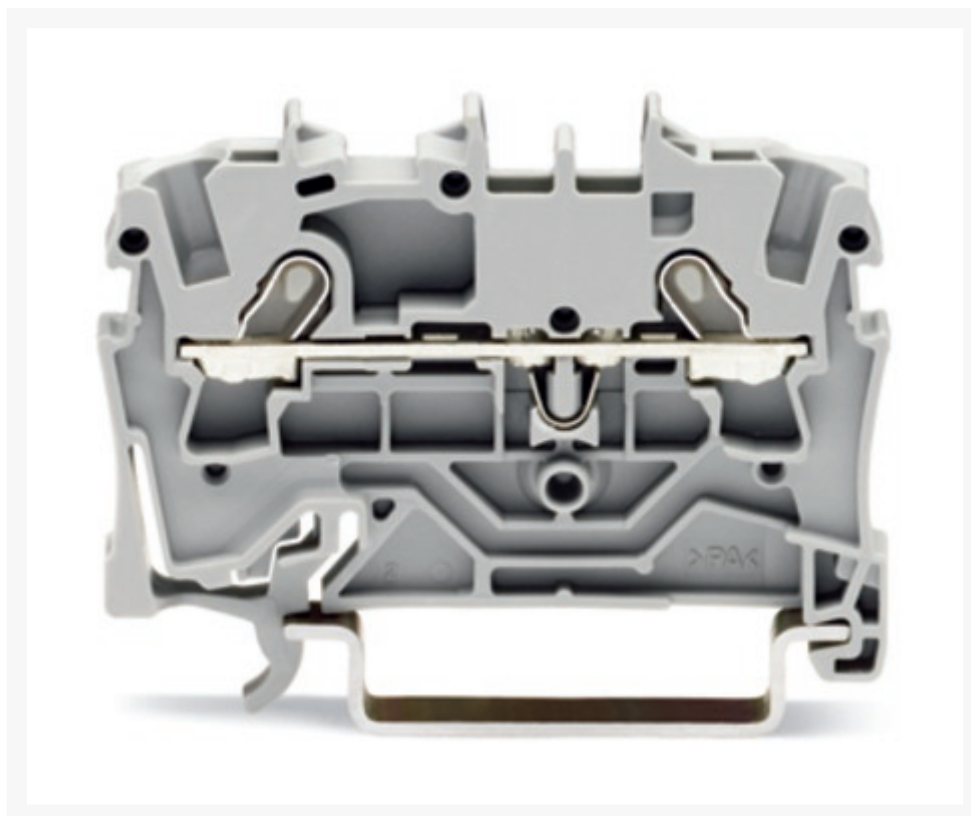

Beschrijving

Name	Value	Unit
Total number of connection points	2	
Total number of potentials	1	
Color	gray	
Ratings according to 1	IEC/EN 60947-7-1	
Rated voltage (III / 3) [V]	800	V

Rated surge voltage (III / 3) [kV]	8	kV
Nominal current [A]	18	A
Nominal current (2) [A]	24	A
Rated voltage EN (Ex e II) [V]	550	V
Nominal current (Ex e II) [A]	17	A
Nominal current (Ex e II) with jumper [A]	16	A
Connection technology	Push-in CAGE CLAMP®	
Number of connection points	2	
Actuation type	Betätigungswerkzeug	
Connectable conductor materials	Kupfer	
Nominal cross section	1.5 mm ²	
Solid sizes	0.25 ... 2.5 mm ² / 22 ... 14 AWG	
solid, directly pluggable	0.5 ... 2.5 mm ² / 20 ... 14 AWG	
Fine-stranded wires	0.25 ... 2.5 mm ² / 22 ... 14 AWG	
min. fine-stranded with insulated ferrule, push-in terminati	0.75 mm ² / 18 AWG	
Strip length	9 ... 11 mm / 0.35 ... 0.43 in	
Type of wiring	Front-entry wiring	
Design	horizontal	
Marking level	Center/Side marking	
Insulating material	Polyamide 66 (PA 66)	
Fire load [MJ]	0.086	MJ
Weight [g]	3.9	g
Width	4.2 mm / 0.165 in	
Height from upper-edge of DIN-rail	32.9 mm / 1.295 in	
Length	48.5 mm / 1.909 in	
Type of mounting	DIN-35 rail	

Productinformatie

Artikelnummer	AKDR30GR
Merk	Brand

