


LITHIUM 3.6V 1100MA 1/2AA 14.1X25MM

€ 8,35

Excl. BTW: € 6,90

Afbeeldingen

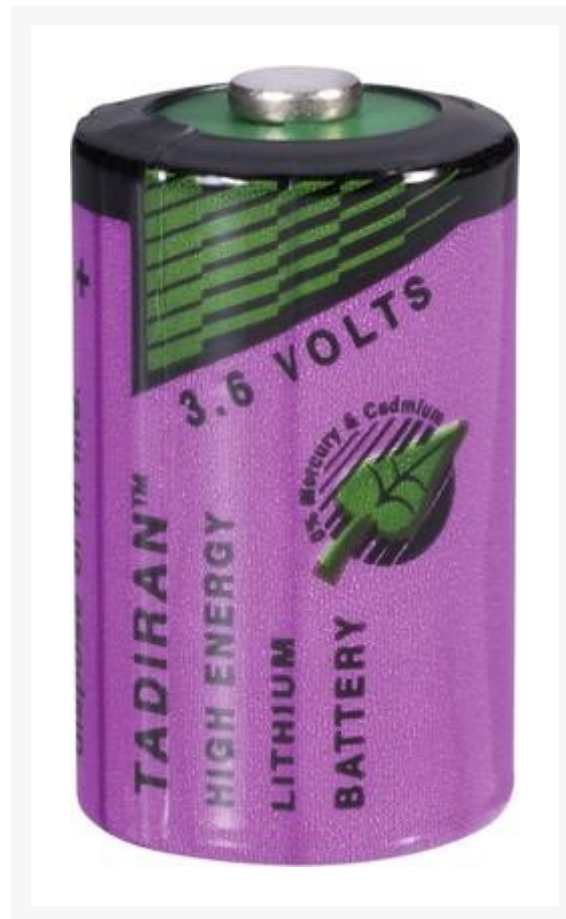

Beschrijving

Features

- High energy density
- Long term high performance
- Major improvement of voltage delay at the start of discharge at medium current levels
- Intermittent discharge at medium current levels
- Wide temperature range from -55°C to +85°C

Technical Specifications

System:	LiSOCl ₂
Nominal Voltage:	3,6V
Temperature Range:	-55...+85°C

Part No.	Cell Size	C _N [mAh]	I _N [mA]	I _{max.} [mA]	I _p [mA]
SL-750/S	1/2AA	1100	1	50	100
SL-750/T	1/2AA	1100	1	50	100
SL-750/P	1/2AA	1100	1	50	100
SL-761/S	2/3AA	1500	1,3	75	150
SL-761/T	2/3AA	1500	1,3	75	150
SL-761/P	2/3AA	1500	1,3	75	150
SL-760/S	AA	2200	2	100	200
SL-760/T	AA	2200	2	100	200
SL-760/P	AA	2200	2	100	200

Productinformatie

Artikelnummer	SL750/S
Merk	TADIRAN

