


POLYESTERFOLIE 3N3 100V 5MM

€ 0,42

Excl. BTW: € 0,35

Afbeeldingen

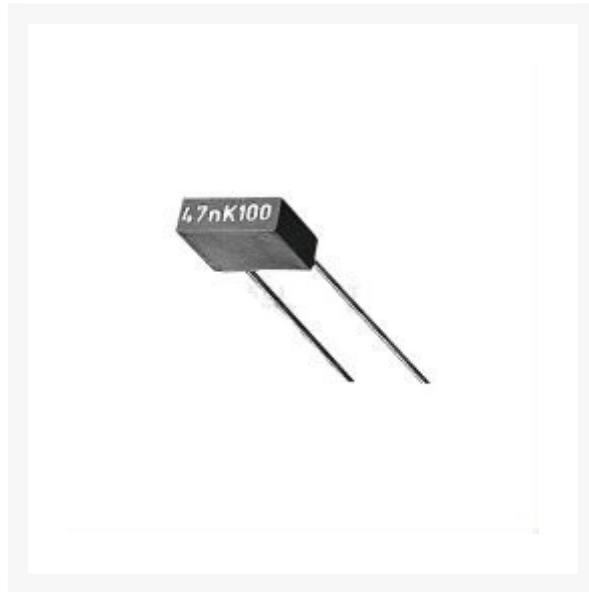

Beschrijving

Features

- Dielectric, polyester film (polyethylene terephthalate)
- Box material is solvent resistant and flame retardant according to UL94V-0
- Tinned wire leads
- Low attenuation
- High pulse rating



Technical Specifications



| | |
|---|------------|
| Rated Voltage (U_N): | See Table |
| Test Voltage (2s; 25 ⁺⁵⁰ C): | 1,4x U_N |
| Capacitance Tolerance (1kHz): | ±10% |

| | |
|--|----------------------|
| Temperature Range: | -55...+105°C |
| Climatic Category | |
| IEC 60068-1: | 55/100/56 |
| Insulation Resistance, Min. | |
| to incl. 330nF: | 15GOhm |
| 330nF...1µF: | 5000s |
| from 1µF: | 1000s |
| Pulse Rise Time, Max. (du/dt) | |
| 100V DC: | 100V/µs |
| 63V DC: | 70V/µs |
| Reliability (MIL HDB 217) (40°C, 0,5 x U _N): | 1,0fit ¹⁾ |

¹⁾ 1fit = 1x10⁻⁹ Failure Components/Hour

Productinformatie

| | |
|---------------|--------|
| Artikelnummer | MKTO33 |
| Merk | KEMET |

