


**POLYESTERFOLIE 6N8 100V 5MM**

**€ 0,42**

Excl. BTW: € 0,35

**Afbeeldingen**

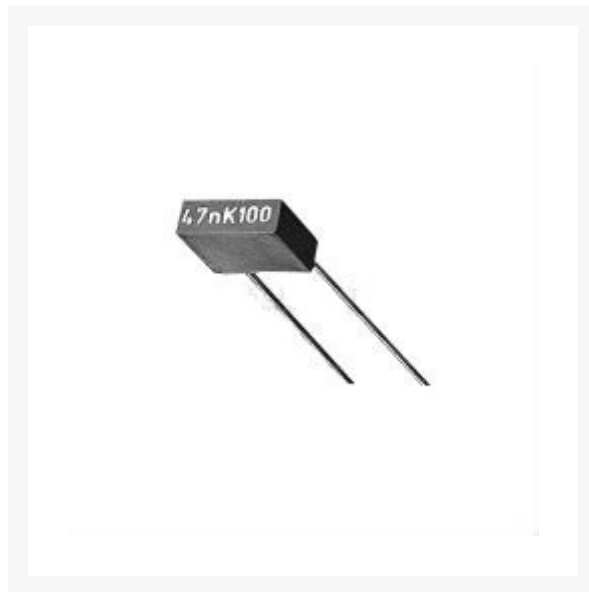

**Beschrijving**

**Features**

- Dielectric, polyester film (polyethylene terephthalate)
- Box material is solvent resistant and flame retardant according to UL94V-0
- Tinned wire leads
- Low attenuation
- High pulse rating



**Technical Specifications**



Rated Voltage ( $U_N$ ):	See Table
Test Voltage (2s; 25 <sup>+50</sup> C):	1,4x $U_N$
Capacitance Tolerance (1kHz):	±10%

Temperature Range:	-55...+105°C
Climatic Category	
IEC 60068-1:	55/100/56
Insulation Resistance, Min.	
to incl. 330nF:	15GOhm
330nF...1µF:	5000s
from 1µF:	1000s
Pulse Rise Time, Max. (du/dt)	
100V DC:	100V/µs
63V DC:	70V/µs
Reliability (MIL HDB 217) (40°C, 0,5 x U <sub>N</sub> ):	1,0fit <sup>1)</sup>

<sup>1)</sup> 1fit = 1x10<sup>-9</sup> Failure Components/Hour

## Productinformatie

Artikelnummer	MKTO68
Merk	KEMET

