


## POLYESTERFOLIE 220N 100V 5MM

€ 0,54

Excl. BTW: € 0,45

### Afbeeldingen

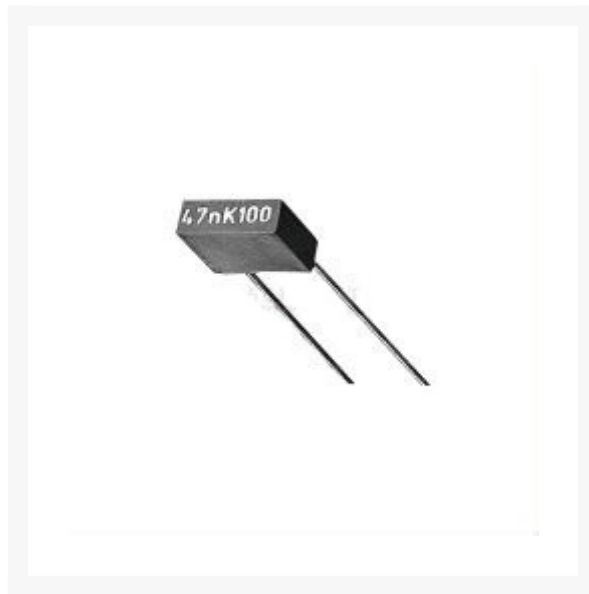

### Beschrijving

#### Features

- Dielectric, polyester film (polyethylene terephthalate)
- Box material is solvent resistant and flame retardant according to UL94V-0
- Tinned wire leads
- Low attenuation
- High pulse rating



#### Technical Specifications



|                                          |            |
|------------------------------------------|------------|
| Rated Voltage ( $U_N$ ):                 | See Table  |
| Test Voltage (2s; 25 <sup>+50</sup> °C): | 1,4x $U_N$ |
| Capacitance Tolerance (1kHz):            | ±10%       |

|                                                          |                      |
|----------------------------------------------------------|----------------------|
| Temperature Range:                                       | -55...+105°C         |
| Climatic Category                                        |                      |
| IEC 60068-1:                                             | 55/100/56            |
| Insulation Resistance, Min.                              |                      |
| to incl. 330nF:                                          | 15GOhm               |
| 330nF...1µF:                                             | 5000s                |
| from 1µF:                                                | 1000s                |
| Pulse Rise Time, Max. (du/dt)                            |                      |
| 100V DC:                                                 | 100V/µs              |
| 63V DC:                                                  | 70V/µs               |
| Reliability (MIL HDB 217) (40°C, 0,5 x U <sub>N</sub> ): | 1,0fit <sup>1)</sup> |

<sup>1)</sup> 1fit = 1x10<sup>-9</sup> Failure Components/Hour

## Productinformatie

|               |        |
|---------------|--------|
| Artikelnummer | MKT222 |
| Merk          | KEMET  |

