


## TAPO SMART VIDEO DEURBEL


€ 142,95

Excl. BTW: € 118,14

### Afbeeldingen




#### Flexible Placement, Flexible Views



Different wedge choices give users possibilities to make the doorbell suit more placement scenarios. Users can also use the wedges to adjust the views.




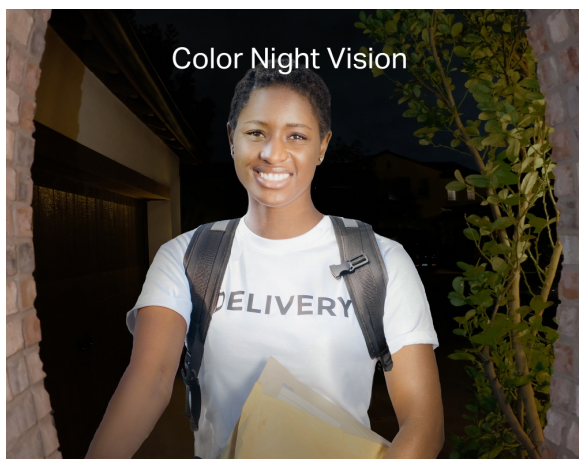

### Color Night Vision

With the spotlight and starlight sensor, it reveals high-fidelity details and color at night.

tapo

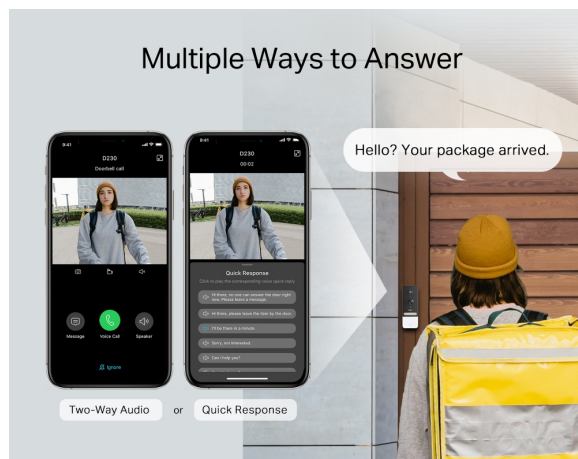

### Multiple Ways to Answer

Hello? Your package arrived.

Two-Way Audio or Quick Response

With two-way audio or a recorded quick response, communicate directly with your deliveries through the Tapo app.

tapo



### Anti-Theft Alarm

Be alerted when someone trying to take the doorbell off with anti-theft alarm function.

tapo

### Person/Pet/Vehicle/Package Detection



Powerful AI identifies person, pet, package, and vehicle, notifying users as needed.

tapo

## Beschrijving

# Tapo smart-videodeurbel op batterijen

- **Liveweergave in 2K 5 MP:** Met de Tapo app zie je altijd wat er voor je deur gebeurt. De camera beschikt over een sterrenlichtsensor en biedt een resolutie van 2K 5 MP zodat alle fijne details zelfs bij slechte lichtomstandigheden worden vastgelegd.
- **Nachtzicht in kleur:** Met de ingebouwde spotlamp en sterrenlichtsensor biedt Tapo D230S1 ook 's nachts details en kleuren met hoge getrouwheid.
- **Weergave van top tot teen :** De brede kijkhoek (160° diagonaal) en de 4:3 liveweergave stelt gebruikers in staat

om bezoekers bij een afstand van 1 m<sup>†</sup> van top tot teen te bekijken. Tapo toont meer verticale details dan andere 16:9 deurbellen.

- **Flexibel te plaatsen voor flexibele weergaven:** Gebruikers kunnen kiezen uit verschillende wighoeken om de deurbel in de juiste positie te plaatsen. Je kunt de wighoek ook gebruiken om de kijkhoek te wijzigen.
- **Langere batterijduur** De oplaadbare en verwijderbare batterij met protocol voor laag vermogen verlengt de gebruiksduur.
- **Slimme AI-detectie en meldingen:** Slimme AI-algoritmen identificeren personen en auto's en sturen gebruikers indien nodig een melding.
- **Meerdere antwoordmogelijkheden:** Met tweeweg audio of een opgenomen reactie kun je direct via de Tapo app met de pakketbezorger communiceren.
- **Flexibele opslagmogelijkheden:** Sla opgenomen video's op de microSD-kaart<sup>§</sup> van de hub op (tot 512 GB) of maak gebruik van de cloudopslagdiensten van Tapo Care<sup>Δ</sup>.
- **Antidiefstal-alarm:** Met de functie antidiefstal-alarm ontvang je een melding als iemand probeert de deurbel mee te nemen.
- **Water- en stofbestendig – IP64:** Werkt goed tijdens regenachtige dagen en in vochtige omgevingen.

## Langere batterijduur

De oplaadbare en verwijderbare batterij met protocol voor laag vermogen verlengt de gebruiksduur.

6700 mAh

Werkt tot 180 dagen<sup>‡</sup>

Aantal activeringen

Batterijduur<sup>‡</sup>

---

10 keer  
30 s/per clip

6 maanden  
Huis met tuin

---

20 keer  
30 s/per clip

3 maanden  
Appartement

---

60 keer  
30 s/per clip  
1 maand  
Huis aan de weg

### CAMERA

Beeldsensor 1/2.7"

## CAMERA

Lens	F/NO: 2,1
Night Vision	850 nm infraroodled tot 7,6 m
Lighting	Built-in Spotlights
Hub Compatibility	Compatible with H200 (Included)

Interface & Button	1× RESET Button 1× Doorbell Button 1× Anti-Theft Button
--------------------	---

Weatherproof Rating	IP64
---------------------	------

Kijkhoek	160° diagonaal
----------	----------------

Resolutie	2K 5 MP (2560 × 1920 px)
-----------	--------------------------

## HUB

Device Compatibility	Works with Tapo smart sensors, buttons, Sub-1G switches, cameras, and video doorbells.
----------------------	--

[All Supported Products>](#)

Connection Capacity	Up to 64 Sub-1G switches, sensors, or buttons + 4 cameras or video doorbells
---------------------	--

Interface & Button	1× Ethernet Port 1× RESET Button 1× MicroSD Card Slot (Up to 512 GB) 1× SYNC Button
--------------------	--

## VIDEO & AUDIO

Maximum Resolution	2K 5MP (2560 × 1920px)
--------------------	------------------------

Frame Rate	15 fps
------------	--------

Digital Zoom	16x
--------------	-----

Video Compression	H.264
-------------------	-------

Live View	Yes
-----------	-----

Image Enhancement	3DNR WDR
-------------------	-------------

Audio Input & Output	Built-in Microphone and Speaker
----------------------	---------------------------------

Audio Communication	Two-Way Audio with Noise Cancellation
---------------------	---------------------------------------

Siren Volume	Doorbell: 96 dB (Anti-theft siren, Level measured at 4-inch/10-cm distance) Hub: 100 dB (Level measured at 4-inch/10-cm distance)
--------------	--

## STORAGE

Local Storage	MicroSD Card Slot on Hub (Up to 512 GB) <a href="#">General Information about using MicroSD Cards &gt;</a>
Cloud Storage	Tapo Care Cloud Storage Services (Subscription required)

## VIDEO

Frame Rate	15 fps
Video Streaming	2K 5MP
Video Compression	H.264
Audio Compression	G.711

## DETECTION and NOTIFICATIONS

Sensor	Single PIR Motion Sensor (FOV: 130° horizontal) One Ambient Light Sensor
AI Detection	Motion Detection Person Detection Pet Detection Vehicle Detection Package Detection
Activity Zones	Yes *Only works with Motion Detection.
Output Notification	System Notification System Notification with Snapshot (Tapo Care Services)

## AUDIO

Audio Communicatie	Tweeweg audio
Audio Input & Output:	Ingebouwde microfoon en speaker

## Netwerk

Network Connectivity	Connect via Wi-Fi
Wireless Connectivity	IEEE 802.11b/g/n, 2.4 GHz Wi-Fi Sub-1G, 868MHz (Used for local connection between doorbell and hub)
Protocol	TCP/IP, ICMP, DNS, HTTPS, TCP, UDP
Ethernet Port	1× 10/100 Mbps RJ45 Port on Hub
Wireless Security	WPA/WPA2-PSK
Standaarden en Protocollen	IEEE 802.11b/g/n, 2.4 GHz
Beveiliging	128-bits AES-versleuteling met SSL/TLS
Frequency	2.4 GHz

<b>Beveiliging</b>	
<b>Security</b>	On-Device Machine Learning 128-bit AES Encryption with SSL/TLS WPA/WPA2-PSK
<b>POWER</b>	
<b>Power Source</b>	Doorbell: 6700 mAh Removable Rechargeable Lithium-ion Battery Hub: 9V DC Power Adapter
<b>Input Voltage</b>	Doorbell Battery Pack Adapter Input: 100-240 V, 50/60 Hz Hub Adapter Input: 100-240 V, 50/60 Hz, 0.3 A
<b>Output Voltage</b>	Hub Adapter Output: 9.0 V, 0.85 A Doorbell Battery Pack Adapter Output: 5.0 V, 1.0 A Hub Adapter Output: 9.0 V, 0.85 A
<b>DC Power Connector Size</b>	
<b>ACTIVITY NOTIFICATIONS</b>	
<b>Input Trigger</b>	Bewegingsdetectie, pakketdetectie, persoonsdetectie, huisdierdetectie, voertuigdetectie.
<b>Output Notification</b>	Meldingen, snapshots (Tapo Care), clips (Tapo Care).
<b>HARDWARE</b>	
<b>Button</b>	Deurbelknop: Resetten/synchroniseren/antidiefstal Hubknop: Resetten, synchroniseren
<b>Indicator LED</b>	Ledindicator deurbel: Systeemled Ledindicator hub: Systeemled
<b>Adapter Input</b>	Ingangsvermogen deurbeladapter: 100-240 V, 50/60 Hz Ingangsvermogen hubadapter: 100-240 V, 50/60 Hz, 0,3 A
<b>Adapter Output</b>	Uitgangsvermogen deurbeladapter: 5,0 V, 1,0 A Uitgangsvermogen hubadapter: 9,0 V, 0,85 A
<b>Product Dimensions (W x D x H)</b>	Afmetingen camera (L x B x H): 146 x 54,5 x 35,5 mm Afmetingen hub (L x B x H): 71,45 x 71,45 x 31,25 mm
<b>Algemeen</b>	
<b>Smart Integration</b>	Google Assistant, Amazon Alexa
<b>Weather Resistance</b>	IP64
<b>System Requirements</b>	Tapo App: iOS 9.0 or higher, Android 4.4 or higher
<b>Mounting Options</b>	Stick to a Wall Mount to a Wall
<b>Operating Temperature</b>	-20°C~45°C
<b>Storage Temperature</b>	-20°C~45°C
<b>Operating Humidity</b>	10%~90% RH, Non-condensing

## Algemeen

<b>Storage Humidity</b>	5%~90% RH, Non-condensing
<b>Dimensions ( W x D x H )</b>	Doorbell Dimensions: 5.7 × 0.21 × 1.3 in (146 × 54.5 × 35.5 mm) Hub Dimensions: 2.8 × 2.8 × 1.2 in (71.45 × 71.45 × 31.25 mm)
<b>Verpakkingsinhoud</b>	Tapo Video Doorbell × 1 Tapo H200 Hub × 1 Tapo A100 Battery × 1 DC Power Adapter × 1 USB Adapter × 1 USB Adapter Cable × 1 RJ45 Ethernet Cable × 1 Inclined Mounting Templates × 1 Mounting Templates × 2 Mounting Brackets × 1 15° Mounting Wedge × 1 Doorbell Detaching Pin × 1 Screws and Anchors × 2 Quick Start Guide
<b>Certifications</b>	CE, RoHS, RCM,R-NZ,FCC, EAC, Triman, UKCA

## ENVIRONMENT

<b>Operating Temperature</b>	-20°C~45°C
<b>Storage Temperature</b>	-20°C~45°C
<b>Operating Humidity</b>	10%~90% RH, niet-condenserend
<b>Storage Humidity</b>	5%~90% RH, niet-condenserend

## Productinformatie

---

Artikelnummer	D230S1
Merk	TP-LINK
Is on Sale	Nee

