


## DIN-RAIL VOEDING 240W 48V/5A

€ 119,00

Excl. BTW: € 98,35

### Afbeeldingen

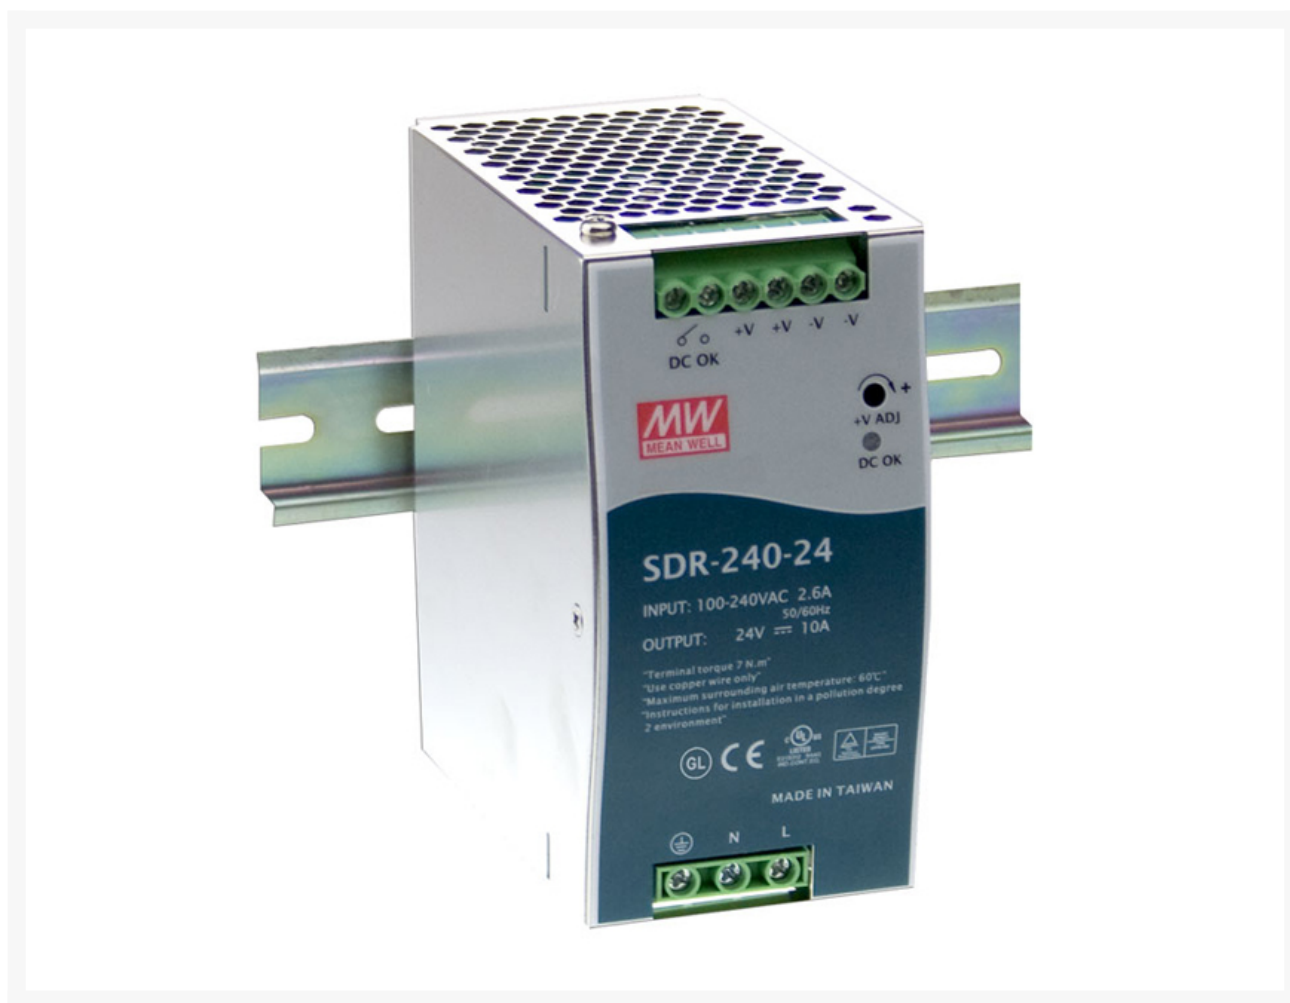

### Beschrijving

- High efficiency 94% and low power dissipation
- 150% peak load capability
- Built-in active PFC function, PF>0.93
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- UL 508 (industrial control equipment) approved
- EN61000-6-2(EN50082-2) industrial immunity level
- Built-in DC OK relay contact
- 100% full load burn-in test

## Technical Specifications

Input Voltage: 88 ~ 264VAC 124 ~ 370VDC

Input Inrush Current, Max.: 65A

uitgangsspanning: 48V +/-1.0%

uitgangsstroom: 5A

max. vermogen: 120W

afmetingen: 63 x 125,2 x 113,5mm

gewicht: 1,03kg

werktemperatuur: -25°C ~ 70°C

## Productinformatie

---

Artikelnummer	SDR24048
Merk	MEANWELL
Is on Sale	Nee

