


RELAIS SOLID STATE 24-280VAC 10A INPUT 90-280VAC

€ 32,50

Excl. BTW: € 26,86

Afbeeldingen

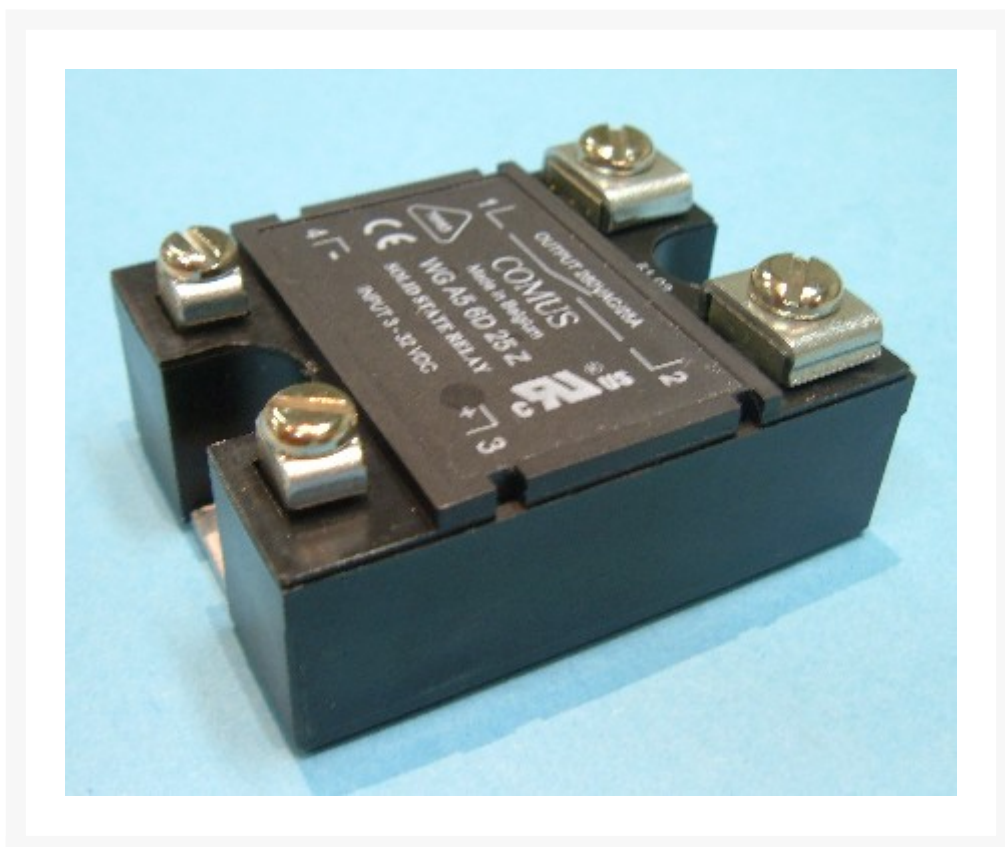

Beschrijving

Control voltage range 90...280 VAC

Control current max. 10 mA

Turn-off voltage min. 10 VAC

Input resistance 30 KOhm

Output circuit

Load voltage range 24...280 VAC

Peak-off-state voltage 600 V_{drn}

Off-state leakage current 6 mA eff.

Load current range 0,1...10 A

Surge current 1 half wave 110 A_{peak}

I²t for fusing 60 A²s

On-state voltage 1,85 V_{peak}

Off-state (static) dv/dt 500 V/μs

Snubber 47 ohm / 47 nF

General data

Turn-on time max. 33 ms 0,1 ms

Turn-off time max. 33 ms

Line frequency range 47...63 Hz

Isolation volt. between input/output 4.000 V

Isolation volt. between input-output/base 2.500 V

Isolation resistance 50 MW

Operation temperature -20...+80 °C

Recommended varistor SIOV-S20 K230

Productinformatie

Artikelnummer	WGA56A10Z
Merk	COMUS
Is on Sale	Nee

