


KONTAKTSTRIP 100P RECHT VERGULD 10 STUKS RASTER 2.54MM

€ 32,50

Excl. BTW: € 26,86

Afbeeldingen

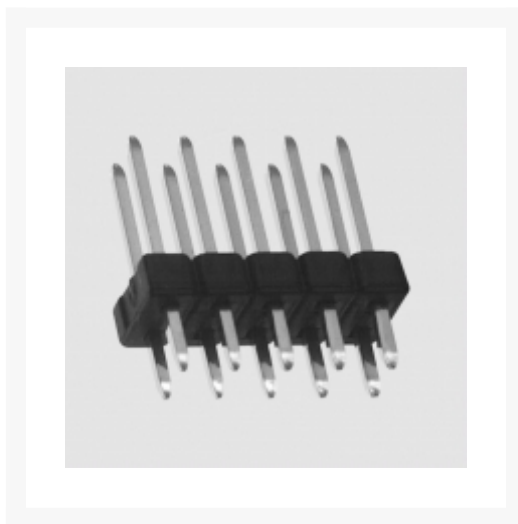

Beschrijving

Features

- gold-plated design
- Arbitrary mounting

Technical Specifications

Insulating Shell: Thermoplastic, UL94V-0
Contact Material (DIN17660): Copper alloy
Contact Surface: Gold-plated
Insulation Resistance, Max.: 40mW
Rated Current: 3A
Rated Voltage: 250V AC
Insulation Resistance, Min.: 500MW
Temperature Range: -40...+105°C
Short Term (10s): +260°C
Solderability: IEC 68-2-20 Tb

Dimensions

Pin Length, Complete1): 14,7mm
Pin Length, Plug-in Area (B): 7,0mm
Pin Length, Soldered Area (C): 3,3mm
Pin Cross Section 0,635x0,635mm
1) Full Length of Short Contacts

Productinformatie

| | |
|---------------|---------|
| Artikelnummer | ASL100G |
| Merk | Brand |
| Is on Sale | Nee |

